
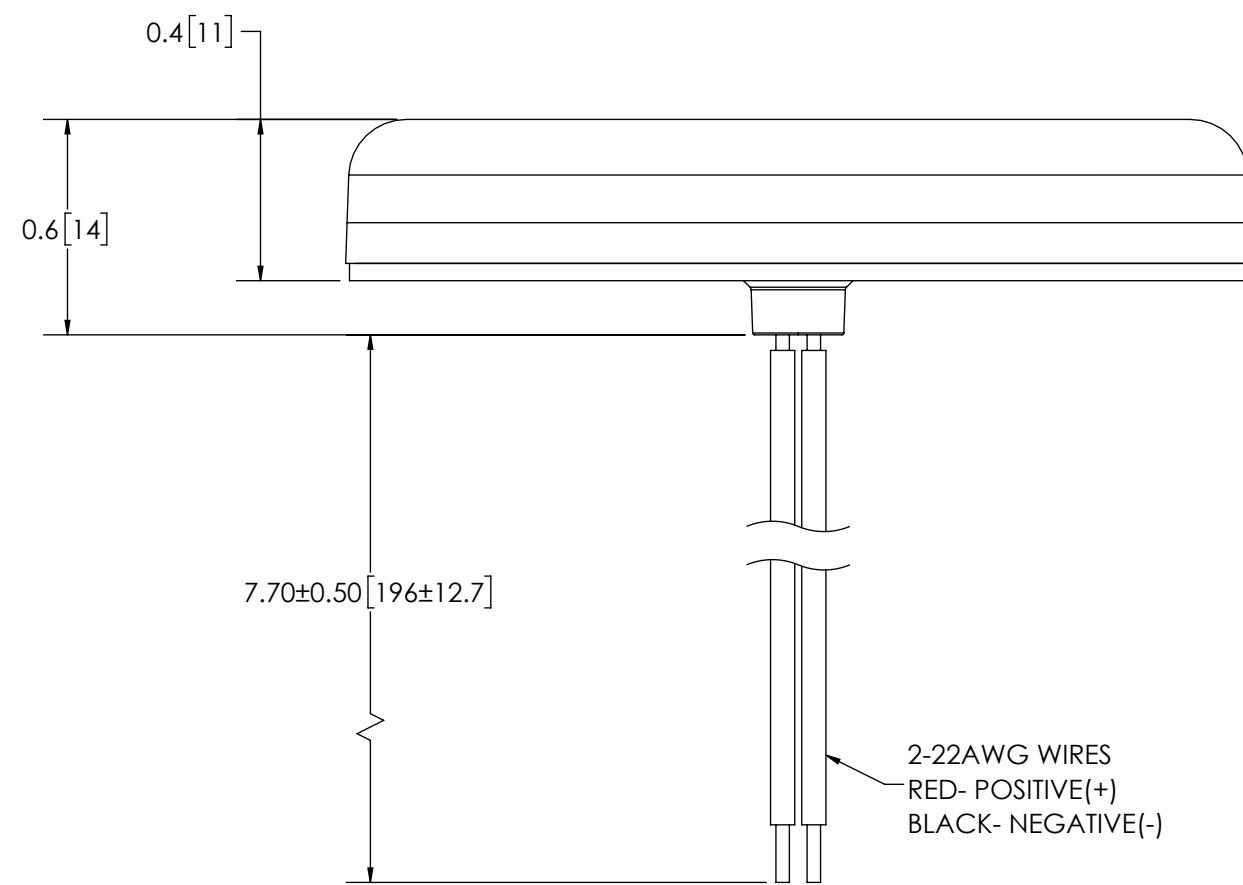


| REVISION HISTORY |                    |            |
|------------------|--------------------|------------|
| REV.             | DESCRIPTION        | DATE       |
| B                | REVISE PER P11019  | 2012-12-06 |
| C                | REVISED PER EC5338 | 2019-04-09 |
| D                | REVISED PER ec7635 | 2025-08-13 |

## SPECIFICATIONS

1. CERTIFICATIONS: **CE**; ECE R10; ; IP-66D  
Note: Unique components, accessories, and hardware kits are not typically included in the Product Certification Test Protocols. Unless otherwise specified, the Product Certifications referred to herein are predicated upon the base product model configuration.
2. FLASH MODE: QUAD :  $70 \pm 5$  FLASHES PER MINUTE
3. VOLTAGE (NOMINAL): 12 to 24 VDC
4. VOLTAGE (EXTREME): 10 to 30 VDC
5. CURRENT (PEAK): SEE CHART (@ 12 VDC NOMINAL)
6. POWER (MAXIMUM): SEE CHART (@ 12 VDC NOMINAL)
7. TEMPERATURE RANGE: -22°F (-30°C) TO 122°F (50°C)
8. CONNECTION: 2-22 AWG WIRES
9. MOUNTING: ADHESIVE
10. BASE MATERIAL: POLYCARBONATE
11. LENS MATERIAL: POLYCARBONATE
12. PRODUCT WEIGHT: 0.02 LBS (0.01 Kg)

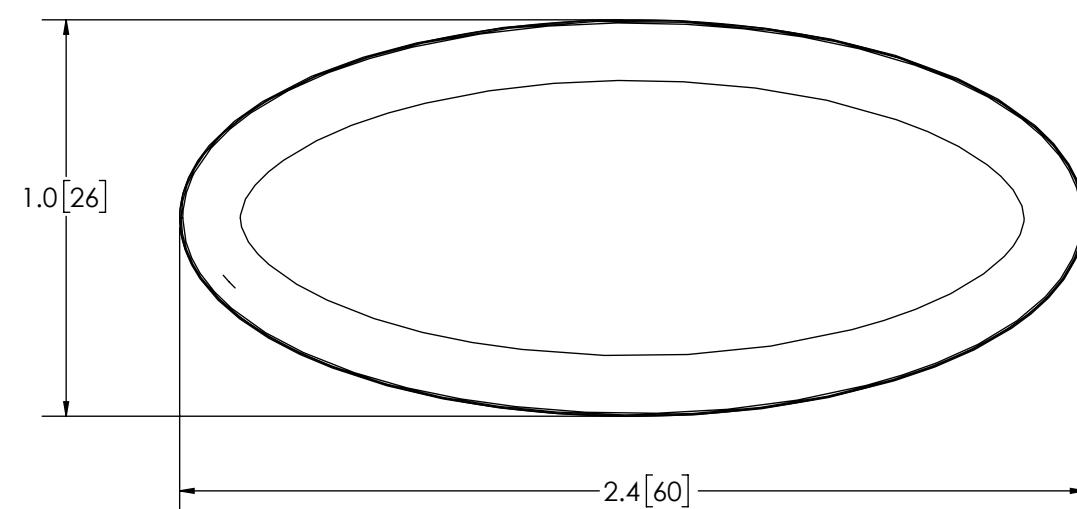

NOTES:  
1. DIMENSIONS IN INCHES [MILLIMETERS (FOR REFERENCE)]

PROPRIETARY AND CONFIDENTIAL INFORMATION  
THIS DRAWING AND THE DESIGN AND OTHER INFORMATION DISCLOSED HEREIN ARE THE PROPERTY OF ELECTRONIC CONTROLS COMPANY AND/OR ITS ECCO SAFETY GROUP AFFILIATES ("ESG") AND IS ISSUED IN CONFIDENCE TO RECIPIENT FOR ENGINEERING INFORMATION PURPOSES ONLY. THIS DRAWING AND THE DESIGN AND OTHER INFORMATION DISCLOSED HEREIN MAY NOT BE USED, COPIED, REPRODUCED OR OTHERWISE DISCLOSED IN PART OR IN WHOLE TO THIRD PARTIES OR USED FOR ANY OTHER PURPOSE WITHOUT PRIOR ESG WRITTEN CONSENT. ESG RESERVES ALL PATENT, COPYRIGHT, TRADEMARK AND OTHER PROPRIETARY RIGHTS TO THIS DOCUMENT, INCLUDING ALL DESIGN, MANUFACTURING, REPRODUCTION, USE AND SALES RIGHTS THERETO. THIS DRAWING IS SUBJECT TO RECALL BY ESG AT ANY TIME, AND YOUR POSSESSION AND/OR USE CONSTITUTES ACCEPTANCE OF THESE TERMS. ©2012 ELECTRONIC CONTROLS COMPANY

| FGS PRODUCT CHART |       |                  |               |
|-------------------|-------|------------------|---------------|
| FGS. NO.          | COLOR | CURRENT (PEAK) A | POWER (MAX) W |
| ED0002A           | AMBER | 0.20             | 2.5           |

| SCALE 2:1  |   | APPROVALS                             | DATE  |
|--|---|---------------------------------------|---|
| CAD GENERATED DRAWING. DO NOT MANUALLY UPDATE ELECTRONICALLY CONTROLLED. USE LATEST COPY |   | DRAWN BY                              | BTK 2025-08-13  |
| TOLERANCES ARE IN INCHES AND MILLIMETERS<br>TOLERANCES UNLESS OTHERWISE STATED ARE:      |   | CHECKED                               | MDH 2025-08-13  |
| DECIMALS (INCHES)<br>X.±1.0<br>X.X±0.5   | DECIMALS (MILLIMETERS)<br>X.X±0.1<br>X.XX±0.04<br>X.XXX±0.002 | ANGLES<br>±0.5°<br>FRACTION<br>± 1/64 | MECH. ENG.<br>ELEC. ENG.<br>TEST ENG.<br>MPG. ENG. ADJ 2025-08-08 |
| THIRD ANGLE PROJECTION   |   | TECH.                                 | 2025-08-08  |
|  |   | PRODUCTION                            | CUSTOMER PART NO.   |
|  |   | PROJ. MGR.                            | SIZE: B DWG. NO. ED0002X REV. D                                   |
|  |   |                                       | SHEET 1 OF 1 Project: P11019 Date Created: 2012-08-23             |

 **ECCO**® [www.eccolink.com](http://www.eccolink.com)  
Americas (800) 635-5900 | Europe +44 (0)113 237 5340 | Asia Pacific +61 (0)3 63322444

3 LED, OVAL, 12-24V

SEE CHART