


4-CONDUCTOR CABLE
 LENGTH: 13.00 ± 0.5 [330 ± 12] FROM EXIT
 BLACK OUTER JACKET, 4-24 AWG WIRES
 RED - POSITIVE(+)
 GREEN - NEGATIVE(-)
 BLUE - SYNCHRONIZE
 YELLOW - POSITIVE(+) FLASH PATTERN SET

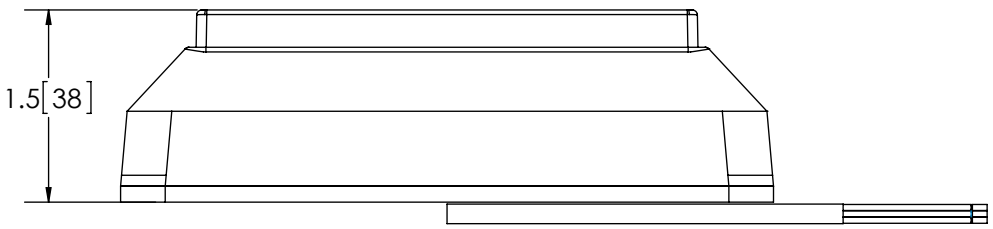

REVISION HISTORY		
REV.	DESCRIPTION	DATE
01	PRELIMINARY RELEASE PER P12023	2012-10-05
A	INITIAL RELEASE PER P12023	2013-02-01
B	REVISE PER P12023	2013-07-30

SPECIFICATIONS

- CERTIFICATIONS: **CE**; e; ECE R10; SAE J595 (NOV 2008) (SEE CHART; IP-67D; For a Category 1, Restricted Enclosure
 Note: Unique components, accessories, and hardware kits are not typically Included in the Product Certification Test Protocols. Unless otherwise Specified, the Product Certifications referred to herein are predicated upon the base product model configuration.
- FLASH MODE: DOUBLE : 74 ± 5 FLASHES PER MINUTE
 QUAD : 74 ± 5 FLASHES PER MINUTE
 QUINT : 74 ± 5 FLASHES PER MINUTE
- VOLTAGE (NOMINAL): 12 VDC
- VOLTAGE (EXTREME): 9 to 16 VDC
- CURRENT (PEAK): 0.3A (@ 12 VDC NOMINAL)
- POWER (MAXIMUM): 4.3W (@ 12 VDC NOMINAL)
- TEMPERATURE RANGE: -22°F (-30°C) TO 122°F (50°C)
- CONNECTION: 4 CONDUCTOR CABLE
- MOUNTING: FLUSH
- BASE MATERIAL: ALUMINUM
- LENS MATERIAL: CLEAR ACRYLIC
- PRODUCT WEIGHT: 0.5 LBS (0.23 Kg)

SPECIFICATIONS CHART		
FGS P/N	COLOR	SAE J595(NOV. 2008)
3715A	AMBER	QUINT FLASH
3715B	BLUE	QUINT FLASH
3715C	CLEAR	DOUBLE, QUAD, QUINT FLASH
3715G	GREEN	N/A
3715R	RED	ALL NON- INTERSPERSED FLASH MODES

DISCLAIMER
 Dimensions, Illustrations, Specifications, and Certifications contained in this document are typical of the actual product and are subject to change. ECCO Engineering does not maintain formal design control of this product.

NOTES:
 1. DIMENSIONS IN INCHES[MILLIMETERS(FOR REFERENCE)]


SCALE 1:1.5		APPROVALS	DATE
CAD GENERATED DRAWING DO NOT MANUALLY UPDATE. MODEL REFERENCED:A		DRAWN BY BND	2013-07-18
TOLERANCES ARE IN INCHES, AND MILLIMETERS TOLERANCES ARE:		CHECKED MDH	2013-07-19
MILLIMETERS DECIMALS XX. ± 1.0mm XX.X ± 0.5mm	INCHES DECIMALS X.X ± 0.1 X.XX ± 0.04 X.XXX ± 0.02	MECH. ENG. NMT	2013-07-18
	ANGLES ± 0.5° FRACTIONS ± 1/64	ELEC. ENG. SPO	2013-07-18
		TEST ENG. JRT	2013-07-29
		SALES. GLB	2013-07-29

ECCO® Electronic Controls Co.
 833 West Diamond Street, Boise, ID 83705
 800-635-5900
 www.eccolink.com

LED HEAD, RECTANGLE, BLACK

CUSTOMER PART NO. **3715X** PRODUCT SERIES: **3700**

NON DISCLOSURE AGREEMENT
 THIS DRAWING AND THE DESIGN IT DISCLOSES ARE THE PRIVATE PROPERTY OF ECCO AND IS ISSUED IN CONFIDENCE FOR ENGINEERING INFORMATION ONLY. THE DRAWING AND / OR DESIGN MAY NOT BE USED, COPIED, REPRODUCED, OR OTHERWISE DISCLOSED IN PART OR AS A WHOLE TO OUTSIDERS OR USED FOR ANY OTHER PURPOSE WITHOUT THE PRIOR WRITTEN CONSENT OF ECCO. THE DRAWING IS SUBJECT TO RECALL AT ANY TIME. YOUR POSSESSION OF THIS DOCUMENT CONSTITUTES ACCEPTANCE OF THESE TERMS. © 2012 ECCO



SIZE: A	DWG. NO. 3715X	REV. B
Electronically Controlled Use Latest Copy SHEET 1 OF 1		Project: P12023 Date Created: 2012-10-05