
	revision history				
REV.	DESCRIPTION	DATE			
02	RE-FORMAT	2003-04-24			
Α	INITIAL RELEASE PER P3 #00012	2004-05-18			
В	UPDATED FORMATTING PER P3 #09001	2009-10-26			

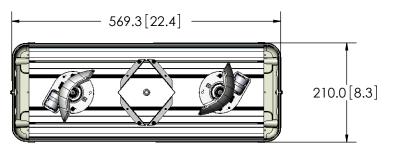


REAR OF VEHICLE

ĺ	WIRING KEY				
	PIN	COLOR	COMPONENT	TYP. MAX CURRENT(A)	COMMENT
	N/A	RED	ROTATORS - OUTER	8.8	
	N/A	BLK	GROUND	40A Limit	RING TERMINAL

SPECIFICATIONS

- 1. FLASH MODE: MAXIMUM 540 FPM
- 2. VOLTAGE (NOMINAL): 12 VDC 3. CURRENT (NOMINAL): 8.8 A
- 4. CONNECTION: 14 OR 16 AWG WIRES IN CABLE
- 5. MOUNTING: 4-BOLT THROUGH MOUNTING KIT 6. BASE MATERIAL: ALUMINUM
- 7. LENS MATERIAL: POLYCARBONATE

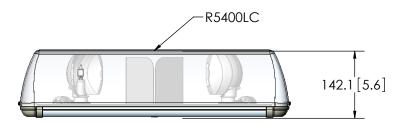

NOTES:

- 1. CABLES AND WIRING NOT SHOWN
- 2. TOP VIEW: TOP LENSES NOT SHOWN FOR CLARITY
- 3. MOUNTING FEET: ADD 30mm TO OVERALL HEIGHT
- 4. THE LENGTH BETWEEN MOUNTING FEET IS ADJUSTABLE
- 5. CABLE LENGTH 0.94m[3.0'] FROM INTERNAL CONNEC 6. CABLE EXIT DRIVER'S SIDE
- 7. DIMENSIONS IN MILLIMETERS[INCHES(FOR REFERENCE)]

		SCALE 1:8.5			
CTOR	CAD GENERATED DRAWING DO NOT MANUALLY UPDATE. MODEL REFERENCED:A				
	TOLERANCES ARE IN MILLIMETERS, AND INC TOLERANCES ARE:		ND INCH		
	XX.X ± 5mm	XX.X ± 0.2	A		
		THIRD ANGLE PROJECTI	ON		
RMATION UTSIDERS OR	-	(h) —	4		

	IDD 70 10\/	
ES		
ECKED		
AWN BY RDE		
APPROVALS DATE		

Electronic Controls Co.

833 West Diamond Street, Boise,ID 83705 800-635-5900

REV.

В

LBR,70,12V,22"/0.57M,143-00068-70

PRODUCT SERIES: CUSTOMER PART NO 70 Series Lightbar 5221003

NON DISCLOSURE AGREEMENT THIS DRAWNICA AND THE DESIGN IT DISCLOSES ARE THE PRIVATE PROPERTY OF ECCO AND IS ISSUED IN CONFIDENCE FOR BYGINEERINGENFORMATION ONLY THE PRAWNING AND / OR DESIGN ANA YIOR BY LIST CONFIDENCE, DREPOPLINGED, OR OTHERWISE DISCLOSED IN FOR AS A WHICH IC OUISIDERS OF USED FOR ANY OTHER PURPOSE WITHOUT THE PRIOR WRITTEN CONSENT OF ECCO. THE DRAWNING IS SUBJECT TO RECALL AT ANY TIME, YOUR POSSESSION OF THIS DOCUMENT CONSTITUTES ACCEPTANCE OF THESE TERMS, 02,002 ECRAS, 02,002 ECRA

