
	REVISION HISTORY					
REV.	DESCRIPTION	DATE				
01	PRELIMINARY RELEASE PER P3 #00012	2003-04-23				
Α	INITIAL RELEASE PER P3 #00012	2004-06-03				
В	UPDATED FORMATTING PER P3 #09001	2009-12-07				

Date Created: 2003-04-23

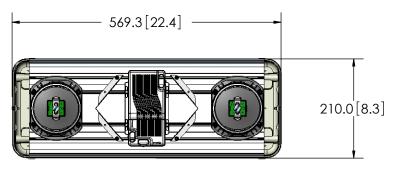


## **REAR OF VEHICLE**

WIRING KEY								
PIN	COLOR	COMPONENT	TYP. MAX CURRENT(A)	COMMENT				
1	RED	STROBE POWER	3.9					
2	ORG	STROBE - DF/QF CONTROL	0.1					
3	GRN	STROBE = DAY/NIGHT CONTROL	0.1					
4	BLK	GROUND	40A Limit	RING TERMINAL				

## **SPECIFICATIONS**

- 1. FLASH MODE: MAXIMUM: 260 FPM
- 2. VOLTAGE (NOMINAL): 12 VDC
- 3. CURRENT (NOMINAL): 4.1 A
- 4. CONNECTION: 14 OR 16 AWG WIRES IN CABLE 5. MOUNTING: 4-BOLT THROUGH MOUNTING KIT
- 6. BASE MATERIAL: ALUMINUM
- 7. LENS MATERIAL: POLYCARBONATE

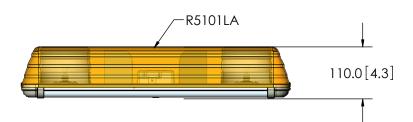

## **NOTES:**

- 1. CABLES AND WIRING NOT SHOWN
- 2. TOP VIEW: TOP LENSES NOT SHOWN FOR CLARITY
- 3. MOUNTING FEET: ADD 30mm TO OVERALL HEIGHT
- 4. THE LENGTH BETWEEN MOUNTING FEET IS ADJUSTABLE
- 5. CABLE LENGTH 0.67m[2.1'] FROM INTERNAL CONNECTOR 6. CABLE EXIT DRIVER'S SIDE
- 7. DIMENSIONS IN MILLIMETERS [INCHES (FOR REFERENCE)]

	APPROVALS DRAWN BY RDE	DATE				Onic Controls Co. Diamond Street, Boise,ID 83705 800-435-5900	
SCALE 1:8.5	CHECKED		_		www.eccolink.com		
CAD GENERATED DRAWING DO NOT MANUALLY UPDATE.	SALES						
MODEL REFERENCED:A  TOLERANCES ARE IN MILLIMETERS, AND INCHES			LBR,60,12V,22"/0.57M,143-00223-60				
TOLERANCES ARE IN MILLIMETERS, AND INCHES TOLERANCES ARE:			CUSTOMER PART NO. 6221006			PRODUCT SERIES: 60 Series Lightbar	
MILLIMETERS DECIMALS INCH DECIMALS ANGLES XX.X ± 5mm XX.X ± 0.2 ± 0.5							
THIRD ANGLE PROJECTION			SIZE: A	DWG. NO.	622100	6	REV.

SHEET 1 OF 1 Project: 00012