
	REVISION HISTORY				
REV.	DESCRIPTION	DATE			
01	PRELIMINARY RELEASE PER P3 #00012	2003-04-18			
Α	INITIAL RELEASE PER P3 #00012	2004-06-07			
В	CHANGES PER LM10201	2010-02-19			

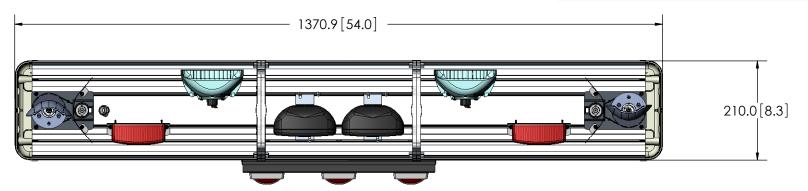


REAR OF VEHICLE

XX.X ± 5mm

WIRING KEY						
PIN	COLOR	COMPONENT	TYP. MAX CURRENT(A)	COMMENT		
N/A	RED	ROTATORS -OUTER	10.2			
N/A	PPL	STT LIGHT - STOP/RIGHT TURN	2.4			
N/A	BRN	STT LIGHT - DOT/TAIL	0.5			
N/A	YEL	STT LIGHT - STOP/LEFT TURN	2.4			
N/A	GRY	WORK LIGHTS	9.2			
N/A	BLK	ALTERNATING FLASHERS - FRONT	4.2			
N/A	WHT	GROUND	40A Limit	RING TERMINAL		

SPECIFICATIONS

- 1. FLASH MODE: MAXIMUM: 730 FPM
- 2. VOLTAGE (NOMINAL): 12 VDC
- 3. CURRENT (NOMINAL): 28.9 A
- 4. CONNECTION: 14 OR 16 AWG WIRES IN CABLE
- 5. MOUNTING: 4-BOLT THROUGH MOUNTING KIT
- 6. BASE MATERIAL: ALUMINUM
- 7. LENS MATERIAL: POLYCARBONATE

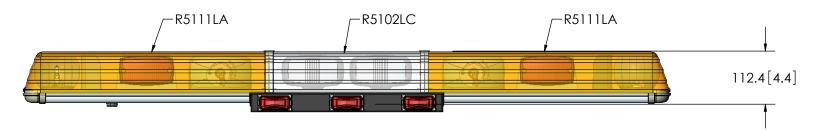

XX.X ± 0.2

NOTES:

- 1. CABLES AND WIRING NOT SHOWN
- 2. TOP VIEW: TOP LENSES NOT SHOWN FOR CLARITY
- 3. MOUNTING FEET: ADD 30mm TO OVERALL HEIGHT
- 4. THE LENGTH BETWEEN MOUNTING FEET IS ADJUSTABLE
- 5. CABLE LENGTH 4.5m[15.0'] FROM INTERNAL CONNECTOR 6. CABLE EXIT DRIVER'S SIDE
- 7. DIMENSIONS IN MILLIMETERS[INCHES(FOR REFERENCE)]

NON DISCLOSURE AGREEMENT	
THIS DRAWNIG AND THE DESIGN IT DISCLOSES ARE THE PRIVATE PROPERTY OF ECCO AND IS SSUED IN CONFIDENCE FOR ENGINEERINGINFORMATION ONLY. THE DRAWNIGS AND / OR DESIGN MAY NOTE BLISD. COPPIER, PERPODUCED, OR OTHERWISE DISCLOSED IN FOR AS A WHOLE TO OUTSIDES USED FOR ANY OTHER PURPOSE WITHOUT THE PRIOR WRITTEN CONSENT OF ECCO. THE DRAWNIG IS SUBJECT TO RECALL AT ANY TIME. YOUR POSSESSION OF THIS DOCUMENT CONSITUTIES ACCEPTANCE OF THESE TERMS. @ 02035 CERMS.	OR

®	
1 L	
<u> </u>	
7,54	

Electronic Controls Co. 833 West Diamond Street, Boise,ID 83705

800-635-5900 www.eccolink.com

В

I"/1.37M.143-00708-60

PRODUCT SERIES:

6543050 60 Series Lightbar REV.

SIZE: DWG. NO. 6543050 Date Created: 2003-04-18 SHEET 1 OF 1 Project: 00012