


3X 0.24[6] X 0.31[8]  
MOUNTING SLOT

5.71±0.50 [145±13]

Ø 6.06 [154]  
MAX. BOLT CIRCLE

Ø 5.90 [150]  
MIN. BOLT CIRCLE

120°  
(TYP.)

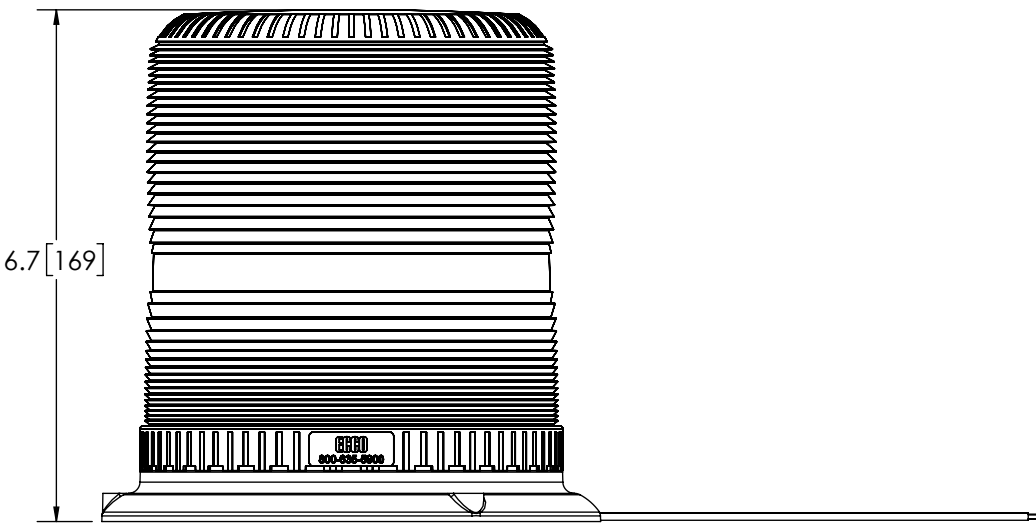

6.7 [169]

REVISION HISTORY		
REV.	DESCRIPTION	DATE
E	REVISE PER P08054	2011-07-12
F	REVISE PER P13005	2015-08-13
G	REVISED PER EC7101	2024-02-08

FGS. PRODUCT CHART		
FGS. NO.	COLOR	J1318 (MAY 1998)
6570A	AMBER	CLASS 2
6570B	BLUE	CLASS 2
6570C	WHITE	CLASS 2
6570G	GREEN	-
6570R	RED	CLASS 2

3-16 AWG WIRES  
RED - POSITIVE(+)  
BLACK - NEGATIVE(-)  
WHITE - DUAL/QUAD

### SPECIFICATIONS

- CERTIFICATIONS: SAE (SEE CHART)  
Note: Unique components, accessories, and hardware kits are not typically included in the Product Certification Test Protocols. Unless otherwise Specified, the Product Certifications referred to herein are predicated upon the base product model configuration.
- FLASH MODE: DOUBLE : 80 ± 5 FLASHES PER MINUTE  
QUAD : 65 ± 5 FLASHES PER MINUTE
- VOLTAGE (NOMINAL): 12 to 48 VDC
- VOLTAGE (EXTREME): 9.0 to 56.0 VDC
- CURRENT (PEAK): 2.4A (@ 12 VDC NOMINAL)
- POWER (MAXIMUM): 30W (@ 12 VDC NOMINAL)
- TEMPERATURE RANGE: -22°F (-30°C) TO 122°F (50°C)
- CONNECTION: 3-16 AWG WIRES
- MOUNTING: FLANGE MOUNT, PIPE MOUNT
- BASE MATERIAL: GLASS FILLED NYLON
- LENS MATERIAL: POLYCARBONATE
- PRODUCT WEIGHT: 1.2 LBS (0.54 Kg)

NOTES:  
1. DIMENSIONS IN INCHES[MILLIMETERS (FOR REFERENCE)]

PROPRIETARY AND CONFIDENTIAL INFORMATION  
THIS DRAWING AND THE DESIGN AND OTHER INFORMATION DISCLOSED HEREIN ARE THE PROPERTY OF ELECTRONIC CONTROLS COMPANY AND/OR ITS ECCO SAFETY GROUP AFFILIATES ("ECCO") AND IS ISSUED IN CONFIDENCE TO RECIPIENT FOR ENGINEERING INFORMATION PURPOSES ONLY. THIS DRAWING AND THE DESIGN AND OTHER INFORMATION DISCLOSED HEREIN MAY NOT BE USED, COPIED, REPRODUCED OR OTHERWISE DISCLOSED IN PART OR IN WHOLE TO THIRD PARTIES OR USED FOR ANY OTHER PURPOSE WITHOUT PRIOR ECCO WRITTEN CONSENT. ECCO RESERVES ALL PATENT, COPYRIGHT, TRADEMARK AND OTHER PROPRIETARY RIGHTS TO THIS DOCUMENT, INCLUDING ALL DESIGN, MANUFACTURING, REPRODUCTION, USE AND SALES RIGHTS THERETO. THIS DRAWING IS SUBJECT TO RECALL BY ECCO AT ANY TIME, AND YOUR POSSESSION AND/OR USE CONSTITUTES ACCEPTANCE OF THESE TERMS. ©1998 ELECTRONIC CONTROLS COMPANY

SCALE 1:2.5		APPROVALS	DATE
CAD GENERATED DRAWING DO NOT MANUALLY UPDATE.		DRAWN BY ABD	2024-02-06
TOLERANCES ARE IN INCHES, AND MILLIMETERS TOLERANCES UNLESS OTHERWISE STATED ARE:		CHECKED BTK	2024-02-07
MILLIMETERS DECIMALS XX. ± 1.0mm XX.X ± 0.5mm	INCHES DECIMALS X.X ± 0.1 X.XX ± 0.04 X.XXX ± 0.02	MECH. ENG. PH	2024-02-07
	ANGLES ± 0.5°	ELEC. ENG. SPO	2024-02-08
	FRACTIONS ± 1/64	TEST ENG. JRT	2024-02-07
THIRD ANGLE PROJECTION		SALES	

**ECCO**® [www.eccolink.com](http://www.eccolink.com)

Americas (800) 635-5900 | Europe +44 (0)113 237 5340 | Asia Pacific +61 (0)3 63322444

**STROBE,360\*,12-48 VDC,7/10 JOULES**

CUSTOMER PART NO.  
**SEE CHART**

SIZE: A	DWG. NO. 6570X	REV. G
Electronically Controlled Use Latest Copy		
SHEET 1 OF 1	Project: 98003	Date Created: 1998-12-08