
	REVISION HISTORY				
REV.	DESCRIPTION	DATE			
01	PRELIMINARY RELEASE PER P3 #00012	2003-04-19			
Α	INITIAL RELEASE PER LM10201	2010-02-22			

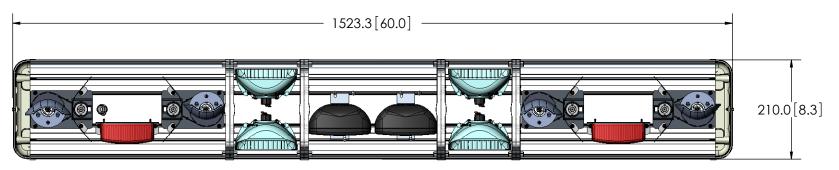


REAR OF VEHICLE

WIRING KEY							
PIN	COLOR	COMPONENT	TYP. MAX CURRENT(A)	COMMENT			
N/A	RED	ROTATORS -OUTER	10.2				
N/A	BLU	ROTATORS -INNER	10.2				
N/A	PPL	STT LIGHT - STOP/RIGHT TURN	2.4				
N/A	BRN	STT LIGHT - DOT/TAIL	0.5				
N/A	YEL	STT LIGHT - STOP/LEFT TURN	2.4				
N/A	GRY	WORK LIGHTS	9.2				
N/A	BLK	ALTERNATING FLASHERS - FRONT	4.2				
N/A	WHT/RED	ALTERNATING FLASHER - REAR	4.2				
N/A	WHT	GROUND	40A Limit	RING TERMINAL			

SPECIFICATIONS

- 1. FLASH MODE: MAXIMUM: 1460 FPM
- 2. VOLTAGE (NOMINAL): 12 VDC
- 3. CURRENT (NOMINAL): 43.3 A
- 4. CONNECTION: 14 OR 16 AWG WIRES IN CABLE
- 5. MOUNTING: 4-BOLT THROUGH MOUNTING KIT
- 6. BASE MATERIAL: ALUMINUM

7. LENS MATERIAL: POLYCARBONATE

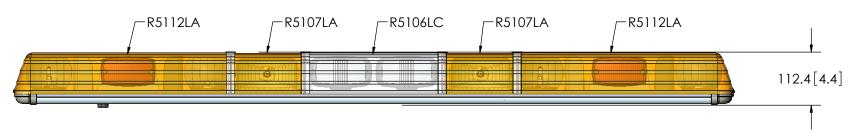

NOTES:

- 1. CABLES AND WIRING NOT SHOWN
- 2. TOP VIEW: TOP LENSES NOT SHOWN FOR CLARITY
- 3. MOUNTING FEET: ADD 30mm TO OVERALL HEIGHT
- 4. THE LENGTH BETWEEN MOUNTING FEET IS ADJUSTABLE
- 5. CABLE LENGTH 4.5m[15.0'] FROM INTERNAL CONNECTOR 6. CABLE EXIT DRIVER'S SIDE
- 7. DIMENSIONS IN MILLIMETERS [INCHES (FOR REFERENCE)]

NON DISCLOSURE AGREEMENT

THIS DRAWING AND THE DESIGN IT DISCLOSES ARE THE PRIVATE PROPERTY OF ECCO AND IS ISSUED IN CONFIDENCE FOR ENGINEERINGINFORMATION ONLY. THE DRAWING AND / OR DESIGN MAY NOT BE USED. COPIED, REPRODUCED, OR OTHERWISE DISCLOSED IN PART OR AS A WHOLE TO OUTSIDERS O USED FOR ANY OTHER PURPOSE WITHOUT THE PRIOR WRITTEN CONSENT OF ECCO. THE DRAWING IS SUBJECT TO RECALL AT ANY TIME, YOUR POSSESSION OF ECCO. THE DRAWING ESUBJECT TO RECALL AT ANY TIME, YOUR POSSESSION OF ECCO. THE DRAWING ESUBJECT TO RECALL AT ANY TIME, YOUR POSSESSION.

	SCALE 1:8.5 CAD GENERATED DRAWING	APPROVALS DRAWN BY RDE CHECKED SALES	DATE	1 1 5 1 1 1 1 1 1			Dnic Controls Co. Diamond Street, Boise,ID 83705 800-635-5900 www.eccolink.com	
₹	DO NOT MANUALLY UPDATE. MODEL REFERENCED:A			LBR,60,12V,60"/1.5M,143-00713-60				
	TOLERANCES ARE IN MILLIMETERS, AND INCHES TOLERANCES ARE: MILLIMETERS DECIMALS NCH DECIMALS XX.X ± 0.2 ± 0.5° XX.X ± 5mm XX.X ± 0.2 ± 0.5°						RODUCT SERIES: 60 Series Lightbar	
N S OR ON	THIRD ANGLE PROJECTION			SIZE: A		360500		REV.
ON				SHEET 1 OF 1	Project: 00012		Date Created: 2003-04-19	A