


TOP VIEW

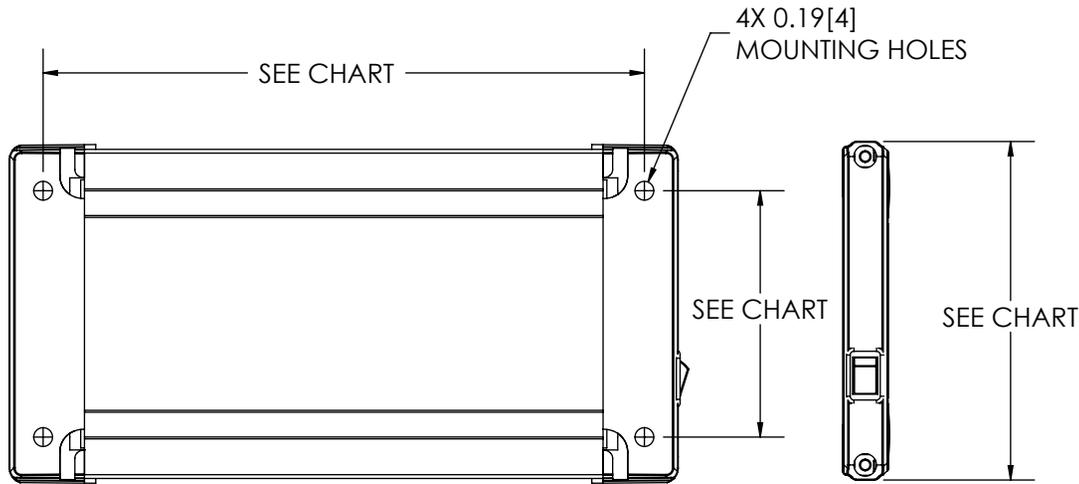

FRONT VIEW

RIGHT VIEW

FGS PRODUCT CHART					
FGS NO.	CURRENT PEAK (AMPS)	MAX POWER (WATTS)	LUMENS		WEIGHT (LBS)
			RAW	EFFECTIVE	
EW0500	0.5	6.4	230	215	0.39
EW0501	0.51	6.53	355	340	0.51
EW0502	0.79	10.11	390	370	0.98
EW0503	0.81	10.37	600	560	1.06

LENGTH, WIDTH, AND MOUNTING CHART				
FGS NO.	LENGTH	WIDTH	HORIZONTAL MOUNTING DISTANCE	VERTICAL MOUNTING DISTANCE
EW0500	7.0[178]	3.5[89]	6.25[159]	2.56[65]
EW0501	7.0[178]	5.8[146]	6.25[159]	4.75[121]
EW0502	18.3[464]	3.5[89]	17.63[448]	2.56[65]
EW0503	14.8[375]	5.8[146]	14.06[357]	4.75[121]

DISCLAIMER
 DIMENSIONS, ILLUSTRATIONS, SPECIFICATIONS, AND CERTIFICATIONS CONTAINED IN THIS DOCUMENT ARE TYPICAL OF THE ACTUAL PRODUCT AND ARE SUBJECT TO CHANGE. ECCO ENGINEERING DOES NOT MAINTAIN FORMAL DESIGN CONTROL OF THIS PRODUCT.

- NOTES:**
- FOR INTERIOR USE ONLY
 - ROHS COMPLIANT
 - DIMENSIONS IN INCHES[MILLIMETERS (FOR REFERENCE)]

MOUNTING DISCLAIMER:
 MOUNTING MEASUREMENT IS FOR REFERENCE ONLY. MEASURE BEFORE DRILLING.

REVISION HISTORY		
REV.	DESCRIPTION	DATE
04	REVISED PER LM14240	2015-12-08
A	INITIAL RELEASE PER LM14240	2015-12-30
B	REVISE PER LM14240	2016-03-14

SPECIFICATIONS

- CERTIFICATIONS: **CE**; ECE R10;
 Note: Unique components, accessories, and hardware kits are not typically included in the Product Certification Test Protocols. Unless otherwise Specified, the Product Certifications referred to herein are predicated upon the base product model configuration.
- RAW LUMENS: SEE CHART
- EFFECTIVE LUMENS: SEE CHART
- ILLUMINANCE: lux
- PEAK BEAM INTENSITY: Candela
- EFFICACY: lm/W
- CORRELATED COLOR TEMPERATURE: K
- VOLTAGE (NOMINAL): 12 to 24 VDC
- VOLTAGE (EXTREME): 10 to 30 VDC
- CURRENT (PEAK): SEE CHART (@ 12 VDC NOMINAL)
- POWER (MAXIMUM): SEE CHART (@ 12 VDC NOMINAL)
- TEMPERATURE RANGE: -22°F (-30°C) TO 122°F (50°C)
- CONNECTION: 2 WIRES
- MOUNTING: 4 BOLT
- HOUSING MATERIAL: ALUMINUM
- LENS MATERIAL: ACRYLIC
- PRODUCT WEIGHT: SEE CHART

NON DISCLOSURE AGREEMENT
 THIS DRAWING AND THE DESIGN IT DISCLOSES ARE THE PRIVATE PROPERTY OF ESG AND IS ISSUED IN CONFIDENCE FOR ENGINEERING INFORMATION ONLY. THE DRAWING AND / OR DESIGN MAY NOT BE USED, COPIED, REPRODUCED, OR OTHERWISE DISCLOSED IN PART OR AS A WHOLE TO OUTSIDERS OR USED FOR ANY OTHER PURPOSE WITHOUT THE PRIOR WRITTEN CONSENT OF ESG. THE DRAWING IS SUBJECT TO RECALL AT ANY TIME. YOUR POSSESSION OF THIS DOCUMENT CONSTITUTES ACCEPTANCE OF THESE TERMS. © 2015 ECCO

SCALE 1:2	APPROVALS	DATE	 www.eccolink.com Americas (800) 635-5900 Europe +44 (0)113 237 5340 Asia Pacific +61 (0)3 63322444							
CAD GENERATED DRAWING DO NOT MANUALLY UPDATE. MODEL REFERENCED:01	DRAWN BY ABD	2016-03-02								
	CHECKED MDH	2016-03-03								
	TOLERANCES ARE IN INCHES, AND MILLIMETERS TOLERANCES UNLESS OTHERWISE STATED ARE:	MECH. ENG. JLA			2016-03-02					
<table border="1"> <tr> <th>MILLIMETERS DECIMALS</th> <th>INCHES DECIMALS</th> <th>ANGLES</th> </tr> <tr> <td>XX. ± 1.0mm XX.X ± 0.5mm</td> <td>X.X ± 0.1 X.XX ± 0.04 X.XXX ± 0.02</td> <td>± 0.5° FRACTIONS ± 1/64</td> </tr> </table>	MILLIMETERS DECIMALS	INCHES DECIMALS	ANGLES	XX. ± 1.0mm XX.X ± 0.5mm	X.X ± 0.1 X.XX ± 0.04 X.XXX ± 0.02	± 0.5° FRACTIONS ± 1/64	ELEC. ENG. TJT	2016-03-02	INT LIGHT, EW05XX	
MILLIMETERS DECIMALS	INCHES DECIMALS	ANGLES								
XX. ± 1.0mm XX.X ± 0.5mm	X.X ± 0.1 X.XX ± 0.04 X.XXX ± 0.02	± 0.5° FRACTIONS ± 1/64								
	TEST ENG. JRT	2016-03-11	CUSTOMER PART NO. SEE CHART							
	SALES. JPT	2016-03-08	PRODUCT SERIES:							
			SIZE: A	DWG. NO. EW050XX	REV. B					
	Electronically Controlled Use Latest Copy		SHEET 1 OF 1	Project: .LM14240	Date Created: 2015-11-13					

