
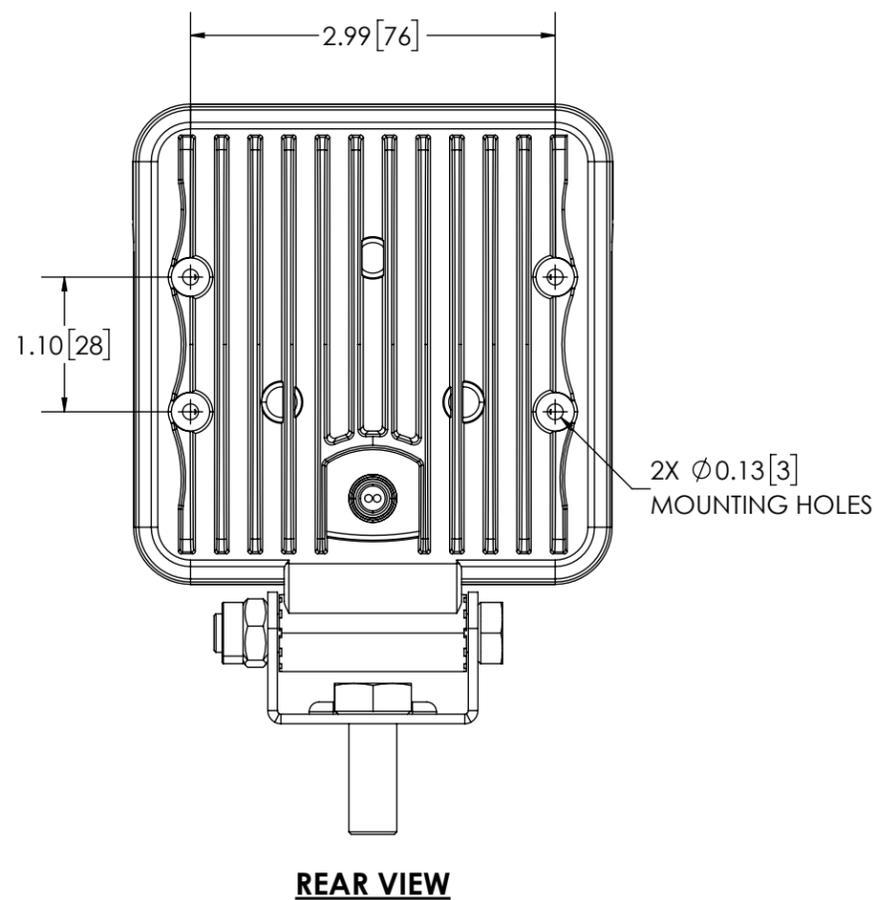
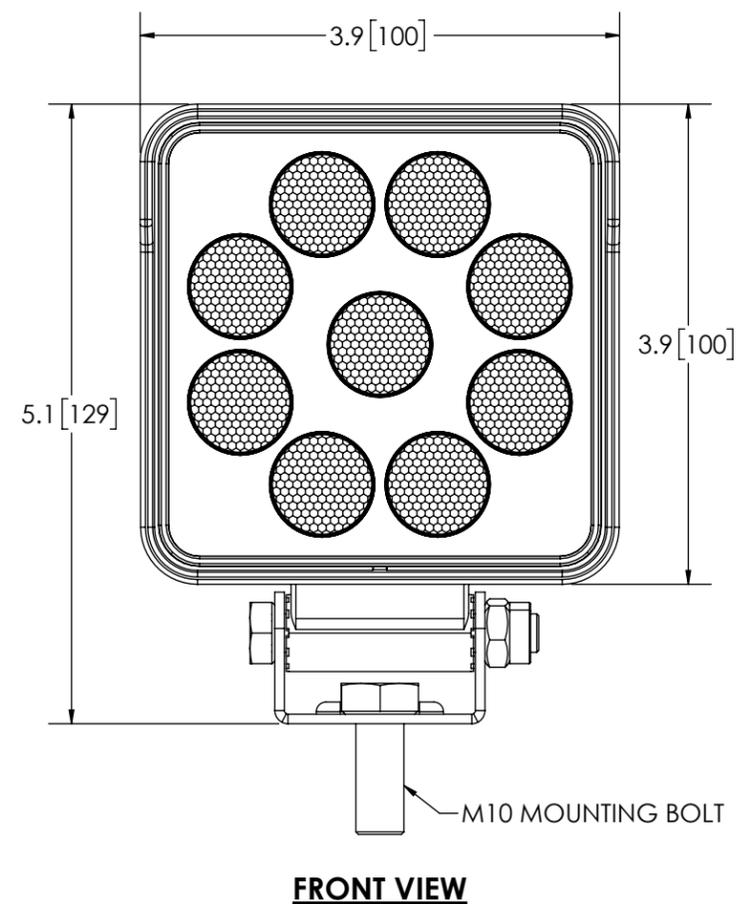


REVISION HISTORY		
REV.	DESCRIPTION	DATE
C	REVISED PER EC6099	2020-08-05
D	REVISED PER EC6728	2022-08-09
E	REVISED PER EC7672	2025-11-03

SPECIFICATIONS

- CERTIFICATIONS: **CE**; **RoHS**; ECE R10; RoHS; IP6K7/IP6K9K; UKCA
Note: Unique components, accessories, and hardware kits are not typically included in the Product Certification Test Protocols. Unless otherwise specified, the Product Certifications referred to herein are predicated upon the base product model configuration.
- RAW LUMENS: 1450 lumens
- EFFECTIVE LUMENS: 1350 lumens
- ILLUMINANCE (@100 FT): 5.35 lux
- PEAK BEAM INTENSITY: 4978 candela
- VOLTAGE (NOMINAL): 12-24 VDC
- VOLTAGE (EXTREME): 9-32 VDC
- CURRENT (PEAK): 1.3 A (@12 VDC NOMINAL)
- POWER (MAXIMUM): 17.9 W (@12 VDC NOMINAL)
- TEMPERATURE RANGE: -22° F (-30° C) TO 122° F (50° C)
- CONNECTION: 2-18 AWG CABLE
- MOUNTING: SINGLE BOLT
- HOUSING MATERIAL: ALUMINUM
- LENS MATERIAL: POLYCARBONATE
- PRODUCT WEIGHT: 1.1 lbs (0.5 Kg)

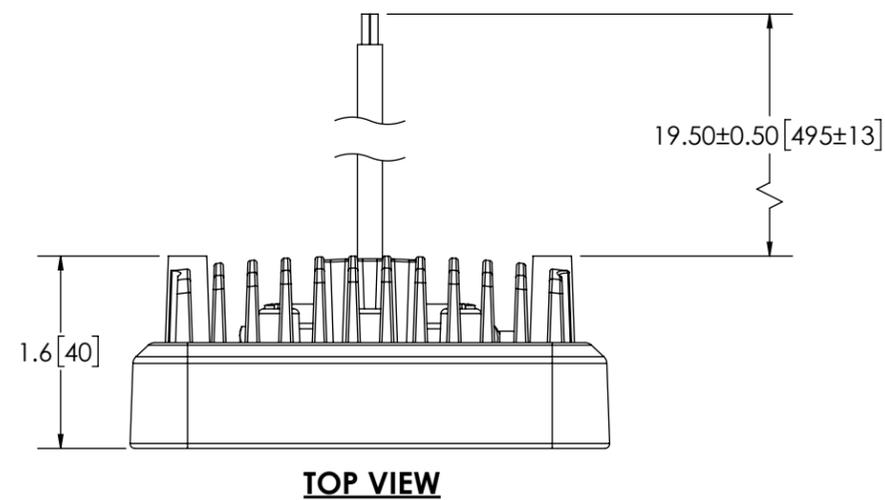


NOTES:

- ROHS COMPLIANT
- DIMENSIONS IN INCHES[MILLIMETERS (FOR REFERENCE)]

DISCLAIMER

DIMENSIONS, ILLUSTRATIONS, SPECIFICATIONS AND CERTIFICATIONS CONTAINED IN THIS DOCUMENT ARE TYPICAL OF THE ACTUAL PRODUCT AND ARE SUBJECT TO CHANGE. ECCO ENGINEERING DOES NOT MAINTAIN FORMAL DESIGN CONTROL OF THIS PRODUCT.

SCALE 2:3		APPROVALS	DATE	 ECCO www.eccolink.com Americas (800) 635-5900 Europe +44 (0)113 237 5340 Asia Pacific +61 (0)3 63322444														
CAD GENERATED DRAWING DO NOT MANUALLY UPDATE.		DRAWN BY BTK	2025-10-30															
TOLERANCES ARE IN INCHES, AND MILLIMETERS TOLERANCES UNLESS OTHERWISE STATED ARE:		CHECKED MDH	2025-10-31															
<table border="1"> <thead> <tr> <th>MILLIMETERS DECIMALS</th> <th>MILLIMETERS FRACTIONS</th> <th>INCHES DECIMALS</th> <th>INCHES FRACTIONS</th> <th>ANGLES</th> </tr> </thead> <tbody> <tr> <td>XX. ± 1.0mm</td> <td>X.X ± 0.1</td> <td>X.XX ± 0.04</td> <td>X.XXX ± 0.02</td> <td>± 0.5°</td> </tr> <tr> <td>XX.X ± 0.5mm</td> <td></td> <td></td> <td></td> <td>FRACTIONS ± 1/64</td> </tr> </tbody> </table>		MILLIMETERS DECIMALS	MILLIMETERS FRACTIONS		INCHES DECIMALS	INCHES FRACTIONS	ANGLES	XX. ± 1.0mm	X.X ± 0.1	X.XX ± 0.04	X.XXX ± 0.02	± 0.5°	XX.X ± 0.5mm				FRACTIONS ± 1/64	MECH. ENG. JLA
MILLIMETERS DECIMALS	MILLIMETERS FRACTIONS	INCHES DECIMALS	INCHES FRACTIONS	ANGLES														
XX. ± 1.0mm	X.X ± 0.1	X.XX ± 0.04	X.XXX ± 0.02	± 0.5°														
XX.X ± 0.5mm				FRACTIONS ± 1/64														
THIRD ANGLE PROJECTION		ELEC. ENG. SPO	2025-10-31															
		TEST ENG. JRT	2025-10-31															
Electronically Controlled Use Latest Copy		SALES.																
SIZE: B	DWG. NO. E92006	CUSTOMER PART NO. E92006																
SHEET 1 OF 1	Project: EC3410	Date Created: 2013-02-08	REV. E															

PROPRIETARY AND CONFIDENTIAL INFORMATION
THIS DRAWING AND THE DESIGN AND OTHER INFORMATION DISCLOSED HEREIN ARE THE PROPERTY OF ELECTRONIC CONTROLS COMPANY AND/OR ITS ECCO SAFETY GROUP AFFILIATES ("ECCO") AND IS ISSUED IN CONFIDENCE TO RECIPIENT FOR ENGINEERING INFORMATION PURPOSES ONLY. THIS DRAWING AND THE DESIGN AND OTHER INFORMATION DISCLOSED HEREIN MAY NOT BE USED, COPIED, REPRODUCED OR OTHERWISE DISCLOSED IN PART OR IN WHOLE TO THIRD PARTIES OR USED FOR ANY OTHER PURPOSE WITHOUT PRIOR ECCO WRITTEN CONSENT. ECCO RESERVES ALL PATENT, COPYRIGHT, TRADEMARK AND OTHER PROPRIETARY RIGHTS TO THIS DOCUMENT, INCLUDING ALL DESIGN, MANUFACTURING, REPRODUCTION, USE AND SALES RIGHTS THEREIN. THIS DRAWING IS SUBJECT TO RECALL BY ECCO AT ANY TIME, AND YOUR POSSESSION AND/OR USE CONSTITUTES ACCEPTANCE OF THESE TERMS. ©2013 ELECTRONIC CONTROLS COMPANY