
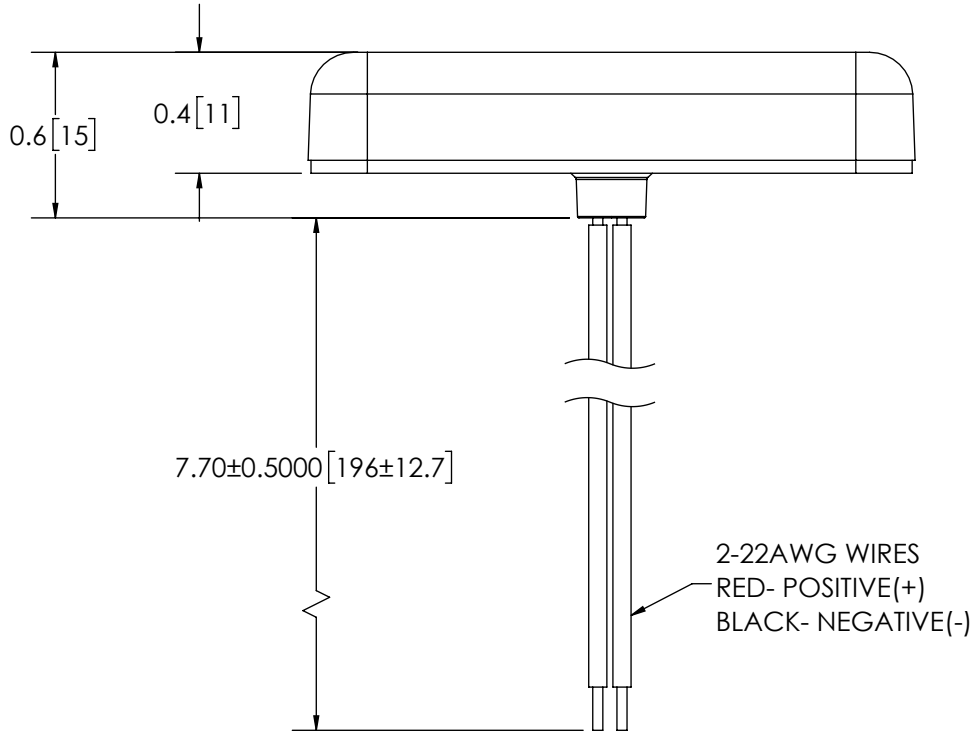


REVISION HISTORY		
REV.	DESCRIPTION	DATE
B	REVISE PER P11019	2012-12-06
C	REVISED PER EC5338	2019-04-09
D	REVISED PER EC7635	2025-08-13

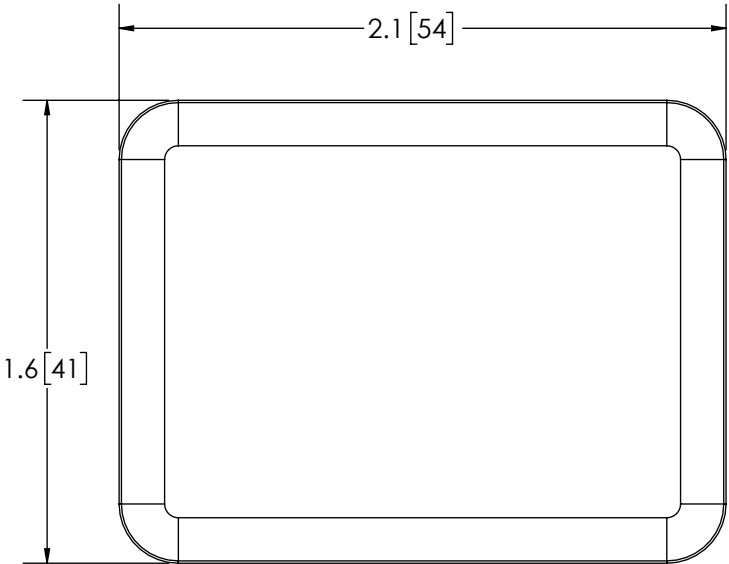

SPECIFICATIONS

1. CERTIFICATIONS: **CE**; ECE R10; ; IP66D
- Note: Unique components, accessories, and hardware kits are not typically Included in the Product Certification Test Protocols. Unless otherwise Specified, the Product Certifications referred to herein are predicated upon the base product model configuration.
2. FLASH MODE: QUAD : 70 ± 5 FLASHES PER MINUTE
3. VOLTAGE (NOMINAL): 12 to 24 VDC
4. VOLTAGE (EXTREME): 10 to 30 VDC
5. CURRENT (PEAK): SEE CHART (@ 12 VDC NOMINAL)
6. POWER (MAXIMUM): SEE CHART (@ 12 VDC NOMINAL)
7. TEMPERATURE RANGE: -22°F (-30°C) TO 122°F (50°C)
8. CONNECTION: 2-22 AWG WIRES
9. MOUNTING: ADHESIVE
10. BASE MATERIAL: POLYCARBONATE
11. LENS MATERIAL: POLYCARBONATE
12. PRODUCT WEIGHT: 0.04 LBS (0.02 Kg)

FGS PRODUCT CHART			
FGS. NO.	COLOR	CURRENT (PEAK) A	POWER (MAX) W
ED0004A	AMBER	0.37	4.8
ED0004C	CLEAR	0.38	4.9

NOTES:
1. DIMENSIONS IN INCHES[MILLIMETERS (FOR REFERENCE)]

PROPRIETARY AND CONFIDENTIAL INFORMATION

THIS DRAWING AND THE DESIGN AND OTHER INFORMATION DISCLOSED HEREIN ARE THE PROPERTY OF ELECTRONIC CONTROLS COMPANY AND/OR ITS ECCO SAFETY GROUP AFFILIATES ("ESG") AND IS ISSUED IN CONFIDENCE TO RECIPIENT FOR ENGINEERING INFORMATION PURPOSES ONLY. THIS DRAWING AND THE DESIGN AND OTHER INFORMATION DISCLOSED HEREIN MAY NOT BE USED, COPIED, REPRODUCED OR OTHERWISE DISCLOSED IN PART OR IN WHOLE TO THIRD PARTIES OR USED FOR ANY OTHER PURPOSE WITHOUT PRIOR ESG WRITTEN CONSENT. ESG RESERVES ALL PATENT, COPYRIGHT, TRADEMARK AND OTHER PROPRIETARY RIGHTS TO THIS DOCUMENT, INCLUDING ALL DESIGN, MANUFACTURING, REPRODUCTION, USE AND SALES RIGHTS THERETO. THIS DRAWING IS SUBJECT TO RECALL BY ESG AT ANY TIME, AND YOUR POSSESSION AND/OR USE CONSTITUTES ACCEPTANCE OF THESE TERMS. ©2012 ELECTRONIC CONTROLS COMPANY

SCALE 3/2		APPROVALS		DATE	
CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE ELECTRONICALLY CONTROLLED, USE LATEST COPY		DRAWN BY	BTK	2025-08-07	
TOLERANCES ARE IN INCHES AND MILLIMETERS TOLERANCES UNLESS OTHERWISE STATED ARE:		CHECKED	MDH	2025-08-08	
DECIMALS (MILLIMETERS) X ± 1.0 X.X ± 0.5	DECIMALS (INCHES) X.X ± 0.1 X.XX ± 0.04 X.XXX ± 0.002	ANGLES	MECH. ENG.		
		± 0.5°	ELEC. ENG.		
		FRACTIONS ± 1/64	TEST ENG.		
		MFG. ENG.	ADJ	2025-08-07	
THIRD ANGLE PROJECTION		TECH.		CUSTOMER PART NO.	
		PRODUCTION		SEE CHART	
		PROJ. MGR.		SIZE: B	
				DWG. NO. ED0004X	
				REV. D	
				SHEET 1 OF 1	
				Project: P11019	
				Date Created: 2012-09-04	

ECCO[®]

www.eccolink.com

Americas (800) 635-5900 | Europe +44 (0)113 237 5340 | Asia Pacific +61 (0)3 63322444

6 LED, RECTANGLE, 12-24V