



| REVISION HISTORY | | |
|------------------|----------------------------|------------|
| REV. | DESCRIPTION | DATE |
| 03 | REVISED PER EL0064 | 2017-08-15 |
| A | INITIAL RELEASE PER EL0064 | 2017-08-16 |
| B | REVISE PER EL0064 | 2017-11-20 |

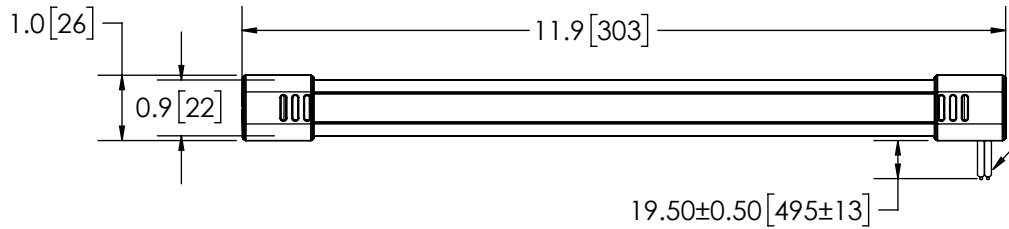

2-18 AWG WIRES
 RED - POSITIVE (+)
 BLACK - NEGATIVE (-)

SPECIFICATIONS


- CERTIFICATIONS: ECE R10; IP67
 Note: Unique components, accessories, and hardware kits are not typically Included in the Product Certification Test Protocols. Unless otherwise Specified, the Product Certifications referred to herein are predicated upon the base product model configuration.
- RAW LUMENS: 200 lumens
- EFFECTIVE LUMENS: 200 lumens
- ILLUMINANCE: lux
- PEAK BEAM INTENSITY: Candela
- EFFICACY: 0.69 lm/W
- CORRELATED COLOR TEMPERATURE: 4857K
- VOLTAGE (NOMINAL): 12-24 VDC
- VOLTAGE (EXTREME): 10-30 VDC
- CURRENT (PEAK): 0.21A (@ 12 VDC NOMINAL)
- POWER (MAXIMUM): 2.9W (@ 12 VDC NOMINAL)
- TEMPERATURE RANGE: -22°F (-30°C) TO 122°F (50°C)
- CONNECTION: 2 LEAD WIRES
- MOUNTING: 2 BOLT
- HOUSING MATERIAL: ALUMINUM
- LENS MATERIAL: POLYCARBONATE
- PRODUCT WEIGHT: 0.27 LBS (0.12 Kg)

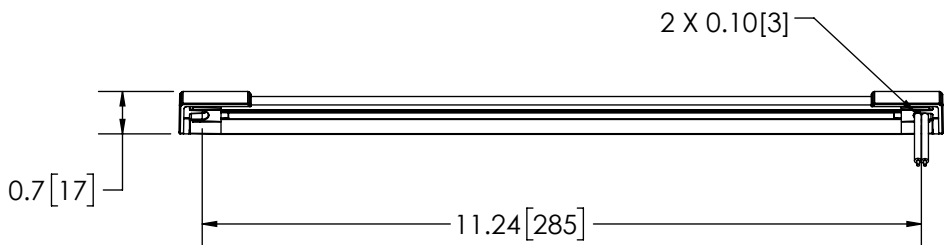

MOUNTING DISCLAIMER:
 MOUNTING MEASUREMENT IS FOR REFERENCE ONLY. MEASURE BEFORE DRILLING.

DISCLAIMER
 DIMENSIONS, ILLUSTRATIONS, SPECIFICATIONS AND CERTIFICATIONS CONTAINED IN THIS DOCUMENT ARE TYPICAL OF THE ACTUAL PRODUCT AND ARE SUBJECT TO CHANGE. ECCO ENGINEERING DOES NOT MAINTAIN FORMAL DESIGN CONTROL OF THIS PRODUCT.

- NOTES:
- ROHS COMPLIANT
 - FOR INTERIOR USE ONLY
 - DIMENSIONS IN INCHES[MILLIMETERS (FOR REFERENCE)]

| | | | |
|--|---|--------------------------|--|
| SCALE 1:3 | APPROVALS | DATE |  ECCO [®] www.eccolink.com Americas (800) 635-5900 Europe +44 (0)113 237 5340 Asia Pacific +61 (0)3 63322444 |
| CAD GENERATED DRAWING DO NOT MANUALLY UPDATE. MODEL REFERENCED: A | DRAWN BY | 2017-11-16 | |
| TOLERANCES ARE IN INCHES, AND MILLIMETERS TOLERANCES UNLESS OTHERWISE STATED ARE: | CHECKED MDH | 2017-11-17 | CORNER INTERIOR LIGHT, 11.9", 12LED, 12-24V CUSTOMER PART NO. EW0800 |
| MILLIMETERS DECIMALS XX. ± 1.0mm XX.X ± 0.5mm | MECH. ENG. | | |
| INCHES DECIMALS X.X ± 0.1 X.XX ± 0.04 X.XXX ± 0.02 | ELEC. ENG. | | PRODUCT SERIES: |
| ANGLES ± 0.5° | TEST ENG. | | SIZE: A |
| FRACTIONS ± 1/64 | SALES | | DWG. NO. EW0800 |
| THIRD ANGLE PROJECTION | | | REV. B |
| | Electronically Controlled Use Latest Copy | SHEET 1 OF 1 | Project: EL0064 |
| | | Date Created: 2017-02-09 | |

THIS DRAWING AND THE DESIGN IT DISCLOSES ARE THE PRIVATE PROPERTY OF ELECTRONIC CONTROLS CO. AND IS ISSUED IN CONFIDENCE FOR ENGINEERING INFORMATION ONLY. THE DRAWING AND / OR DESIGN MAY NOT BE USED, COPIED, REPRODUCED, OR OTHERWISE DISCLOSED IN PART OR AS A WHOLE TO OUTSIDERS OR USED FOR ANY OTHER PURPOSE WITHOUT THE PRIOR WRITTEN CONSENT OF ELECTRONIC CONTROLS CO. THE DRAWING IS SUBJECT TO RECALL AT ANY TIME. YOUR POSSESSION OF THIS DOCUMENT CONSTITUTES ACCEPTANCE OF THESE TERMS. © 2017 ELECTRONIC CONTROLS CO.