
|      | REVISION HISTORY               |            |  |  |  |  |  |  |
|------|--------------------------------|------------|--|--|--|--|--|--|
| REV. | DESCRIPTION                    | DATE       |  |  |  |  |  |  |
| 01   | PRELIMINARY RELEASE PER EC3410 | 2013-02-13 |  |  |  |  |  |  |
| 02   | REVISED PER EC3410             | 2013-02-27 |  |  |  |  |  |  |
| A    | INITIAL RELEASE PER EC3410     | 2013-03-04 |  |  |  |  |  |  |

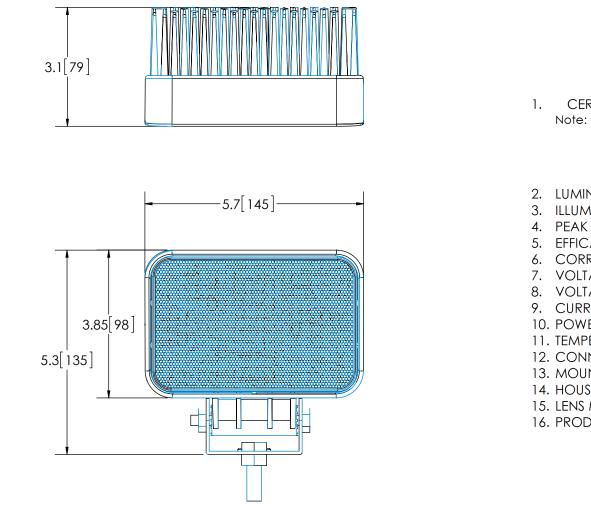

## **SPECIFICATIONS**

- 1. CERTIFICATIONS: CE; IP67
  - Note: Unique components, accessories, and hardware kits are not typically Included in the Product Certification Test Protocols. Unless otherwise Specified, the Product Certifications referred to herein are predicated upon the base product model configuration.
- 2. LUMINOUS FLUX: 2700 lumens
- 3. ILLUMINANCE: lux
- 4. PEAK BEAM INTENSITY: Candela
- 5. EFFICACY: 69.5 lm/W
- 6. CORRELATED COLOR TEMPERATURE: 6600K
- 7. VOLTAGE (NOMINAL): 12 to 24 VDC
- 8. VOLTAGE (EXTREME): 10 to 30 VDC
- 9. CURRENT (PEAK): 3.2A (@ 12 VDC NOMINAL)
- 10. POWER (MAXIMUM): 44.6W (@ 12 VDC NOMINAL)
- 11. TEMPERATURE RANGE: -22°F (-30°C) TO 122°F (50°C)
- 12. CONNECTION: 2 CONDUCTOR CABLE
- 13. MOUNTING: SINGLE BOLT
- 14. HOUSING MATERIAL: ALUMINUM
- 15. LENS MATERIAL: POLYCARBONATE
- 16. PRODUCT WEIGHT: X LBS (0.0 Kg)

|  |  | SCALE 1:2.5   |           | APPROVALS            | DATE                 |                                | <sup>8</sup> Flastrania Cantrala Ca   |  |
|--|--|---|-----------|----------------------|----------------------|--------------------------------|---|--|
|  |  | CAD GENERATED DRAWING<br>DO NOT MANUALLY UPDATE.<br>MODEL REFERENCED: |           | drawn by MDH         | 2013-02-27           |                                | Electronic Controls Co.<br>833 West Diamond Street, Boise, ID 83705<br>800-635-5900 |  |
|  |  |   |           | CHECKED BND          | 2013-02-28           |                                |   |  |
| NOTES:   | TOLERANCES ARE IN INCHES, AND MILLIMETERS<br>TOLERANCES ARE: |   |           | MECH. ENG. JLA       | 2013-02-27           |                                | / www.eccolink.com  |  |
| 1. DIMENSIONS IN INCHES[MILLIMETERS (FOR REFERENCE)]   | XX. ± 1.0mm<br>XX.X ± 0.5mm                                  | * 1.0mm X.X ± 0.1<br>* 0.5mm X.XX ± 0.04<br>X.XXX ± 0.02              | ANGLES    | ELEC. ENG. TJT       | 2013-02-27           | WORK LAMP,5 LED                | D,RECTANGLE,FLOOD,10-30V  |  |
|  |  |   | FRACTIONS | TEST ENG. JRT        | 2013-03-01           |                                |   |  |
|  |  |   | ± 1/64    | sales. WNH           | 2013-03-01           | - EW2501                       | EW2501  |  |
| NON DISCLOSURE AGREEMENT<br>THIS DRAWING AND THE DESIGN IT DISCLOSES ARE THE PROVATE PROPERTY OF ECC O AND IS SUED IN CONFIDENCE FOR ENGINEERINGINFORMATION<br>IN Y THE PRAVINGS AND / OR DESIGN MAY NOTE ELISED. COPIED REPRODUCED OR OTHERWISE DISCLOSED IN PART OR AS A WHOLE TO OUISIDESO ON |  |   |           |                      |                      | SIZE: , DWG, NO,               | EW2501 REV.   |  |
|  |  |   |           |                      |                      | A BITOLINO.                    |   |  |
| USED FOR ANY OTHER PURPOSE WITHOUT THE PRIOR WITHOUT CONSENT OF ECCO. THE DRAWING IS SUBJECT TO RECALL AT ANY TIME, YOUR POSSESSION OF THIS DOCUMENT CONSTITUTES ACCEPTANCE OF THESE TERMS. © 2013 ECCO  |  |   |           | Electronically Contr | olled Use Latest Cop | y SHEET 1 OF 1 Project: EC3410 | Date Created: 2013-02-13 A  |  |