


	REVISION HISTORY						
REV.	DESCRIPTION	DATE					
01	REVISED PER LC1999	2019-01-28					
02	REVISED PER LC1999	2019-02-25					
Α	INITIAL RELEASE PER LC1999	2019-03-19					


Date Created: 2011-01-26





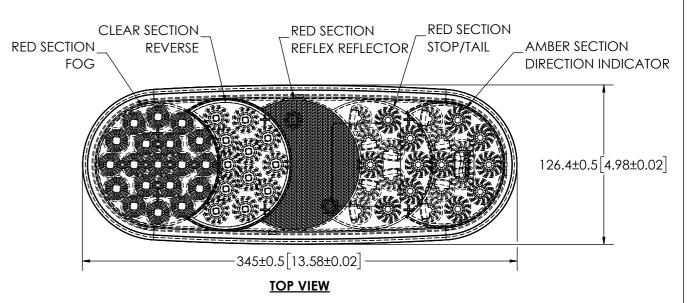



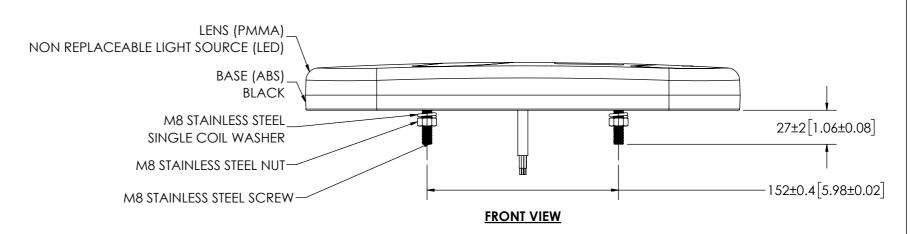

- 1. ENVIRONMENTAL PERFORMANCE: LAMP TO COMPLY WITH BRITAX PMG LTD SPECIFICATION. ENSO31 AND ENSO32
- 2. CABLE AND LENS BASE SEAL MUST BE WATER TIGHT AND COMPLY WITH ECE REG.3.02 (ANNEX 8) WATER SUBMERSION TEST.
- 3. LAMP TO COMPLY WITH THE FOLLOWING ECE REGULATIONS:

3.02 CAT. 1A - REFLEX REFLECTOR

6.01 CAT. 2A - DIRECTION INDICATOR

7.02 CAT. R1 - REAR POSITION (SIDE)

7.02 CAT. S1 - STOP

23.00 CAT. AR - REVERSE

38.00 CAT. F1 - REAR FOG

10.05 - EMC

3.1 MUST COMPLY WITH ABOVE, MOUNTED:

HORIZONTALLY LEFT HAND

HORIZONTALLY RIGHT HAND

AND VERTICALLY WITH DIRECTION INDICATOR FUNCTION UPPERMOST.

4. OPERATIONAL VOLTAGE 10 - 30 VDC.

UNIT MUST COMPLY WITH ENVIRONMENTAL, PHOTOMETRIC AND EMC REQUIREMENTS AS SPECIFIED BETWEEN STATED VOLTAGES.

5. CABLE SPECIFICATION:

THIN WALL AUTOMOTIVE CABLE, ROUND BLACK OUTER SHEATH

6 CORE PVC INSULATED, 24/0.2 (0.75mm)MANUFACTURED TO ISO 6722: 2006 (CLASS B)

5.1 CABLES MAY BE STRIPPED.

6. ALL ENGRAVING TO BE RAISED 0.3mm.

GORETEX AIR VALVE -152[5.98]

			BOTTO	M VIEW						
SCALE 1:3			APPROVALS	DATE						
CAD GENERATED DRAWING DO NOT MANUALLY UPDATE.			DRAWN BY LSH	2019-02-25	ECCO ® www.eccolink.com					
MODEL REFERENCED: 01		снескед NP	2019-03-07	***						
TOLERANCES ARE IN INCHES, AND MILLIMETERS TOLERANCES UNLESS OTHERWISE STATED ARE:		MECH. ENG. FP	2019-02-25	Americas (800) 635-5900 Europe +44 (0)113 237 5340 Asia Pacific +61 (0)3 63322444						
MILLIMETERS DECIMALS	X.X ± 0.1 X.XX ± 0.04 X.XXX ± 0.02 HRD ANGLE PROJECT	0mm X.X ± 0.1 .5mm X.XX ± 0.04 FRACTIONS		ELEC. ENG.			REA	R LED LA	MΡ	
XX. ± 1.0mm XX.X ± 0.5mm			TEST ENG.		L78.00.LDV L78			PRODUCT SERIES:		
		SALF	SALES.					L/O		
A COLORO				SIZE: A3	DWG. NO.	L78.00	.LDV	REV.		

Electronically Controlled Use Latest Copy SHEET 1 OF 1 Project: 29889