

F

E

D

C

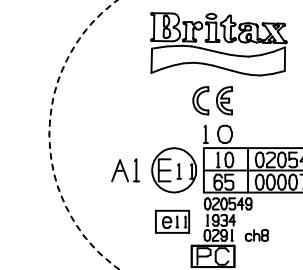
B

A

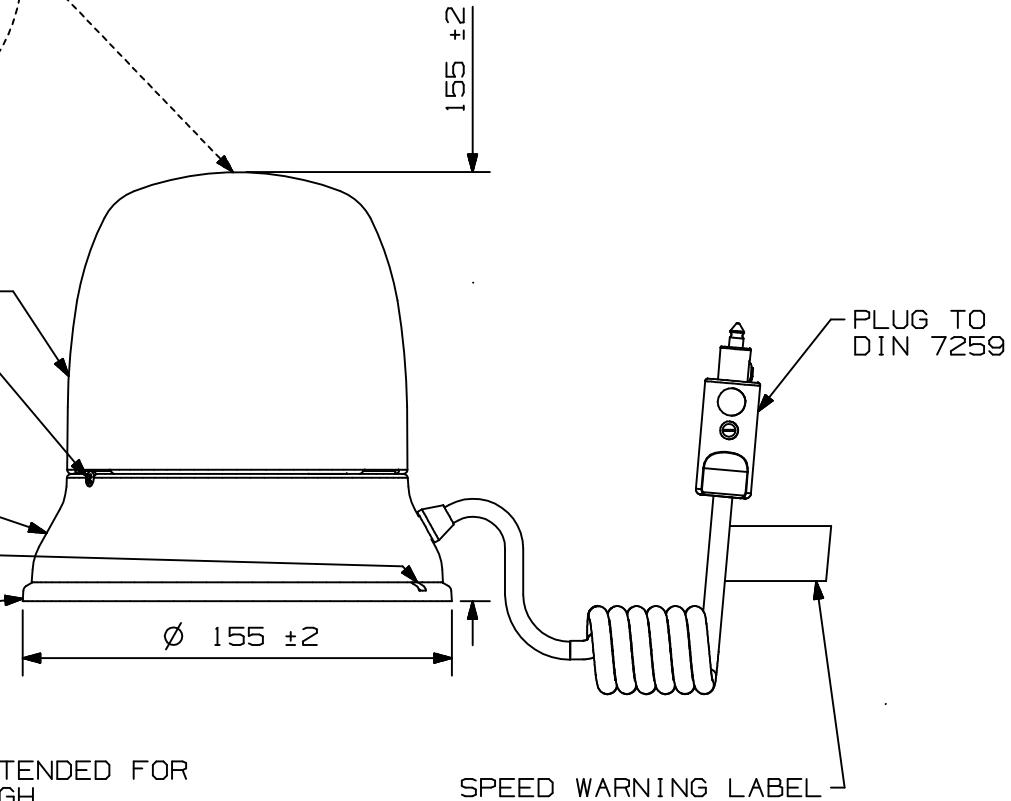
APPROVAL DETAILS

SCALE 1 : 1

NOTE 1

LENS, POLYCARBONATE
AMBERLENS LOCKING SCREW
BLACK COATED STEEL
Note 2BASE, BLACK
TEXTURED

DRAIN HOLE

MAGNET COVER,
BLACK RUBBER

NB.

THESE MAGNETIC BEACONS ARE INTENDED FOR TEMPORARY USE ONLY AND ALTHOUGH WINDTUNNEL TESTED TO 150 MPH (240 KPH) WIND SPEED, WE RECOMMEND A MAXIMUM VEHICLE SPEED OF 50 MPH (80 KPH).

IMPORTANT

THE BEACON BASE SHOULD BE PARALLEL WITH THE GROUND AND FITTED TO THE FLATEST PART OF THE VEHICLE ROOF IN THE LONGITUDINAL CENTRE LINE. THE VEHICLE PANEL MUST BE OF STEEL CONSTRUCTION AND COVERED ONLY WITH THE MANUFACTURERS NORMAL PAINT FINISH.

CERTIFICATION PROCEDURE INVOLVED - UNAUTHORISED DEVIATION STRICTLY FORBIDDEN

| MOD No | REFERENCE | ISS | DATE | BY |
|--------|-----------|-----|----------|-----|
| 20152 | PROD REL | A | 22/01/07 | L.F |

NOTES:

- 1- This beacon complies with the following:
EEC approvals:
1.1- Special warning lamp for motor vehicles
Regulation 65 A1 E11 000078
1.2- EMC, road vehicles
Regulation 10 A1 E11 020549
EEC approvals:
1.3- Electromagnetic Compatibility (EMC)- General Directive 89/336/EEC
1.4- EMC motor vehicles and systems Directive 95/54 e11-020549
1.5- Tractors
Directive 2000/2 e11-1934
1.6- 2-3 wheeled vehicles
Directive 97/24 e11-0291 ch8
- 2- Tightening Torque = 0.65±0.05 Nm.
- 3- ENVIRONMENTAL PERFORMANCE:
MEETS BRITAX PMG ENS 054
- 4- GENERAL PERFORMANCE:
4.1- OPERATING TEMPERATURE: -30° TO +50° C
4.2- NOMINAL VOLTAGE : 12V
4.3- BULB TYPE : H1 55W
4.4- CURRENT CONSUMPTION : 4.6A
4.5- FLASH RATE : 180 RPM NOMINAL
4.6- ROTATION : CW FROM ABOVE
- 5- Tightening Torque = 0.4 Nm.
- 6- PACKING DETAILS:- Beacon supplied in individual plain white cartons.

DIMENSIONS IN MILLIMETRES
DO NOT SCALE IF IN DOUBT - ASK

DRAWN IN ACCORDANCE WITH BS308

DIMENSIONAL TOLERANCES :

AS SPECIFIED

| 3RD ANGLE PROJECTION | METRIC DESIGN |
|----------------------|---------------|
| | |

| | |
|-------------------------------------------------------------------------------------------------|--|
| BRITAX PMG LTD BESSINGBY INDUSTRIAL ESTATE BRIDLINGTON EAST YORKSHIRE YO16 4SJ © | |
|-------------------------------------------------------------------------------------------------|--|

| | | | |
|----------------|------------------|---------------------------------------|--------------|
| DRAWN L.FOX | DATE 20/01/07 | CHECKED SEE RELEASE CHANGE NOTE | SCALE 1.2 |
|----------------|------------------|---------------------------------------|--------------|

| | |
|-------------------------------------------------------|---------------------|
| TITLE BEACON, ROTATING MAGNETIC FIXING 50MPH (EPD096) | |
| A 3 | PART No. B24.114 |

Sht 1
No
of