


REVISION HISTORY		
REV.	DESCRIPTION	DATE
01	PRELIMINARY RELEASE	2001-12-20
02	CORRECTED SPECIFICATIONS	2002-03-22
A	INITIAL RELEASE PER P3# 01043	2002-04-01

- SPECIFICATIONS**
- MANUFACTURER CERTIFIES THAT THIS WARNING LIGHT MEETS SAE J1318 SPECIFICATIONS, CLASS 2, AMBER, BLUE, CLEAR, AND RED COLORS
 - VOLTAGE (NOMINAL): 12-24 VDC
 - VOLTAGE (OPERATING): 10-32 VDC
 - AVERAGE CURRENT: 2.1 A
 - AVERAGE POWER: 25.5 W
 - TEMPERATURE RANGE:
LOW: $-22^{\circ} \pm 5^{\circ} \text{ F}$ ($-30^{\circ} \pm 3^{\circ} \text{ C}$)
HIGH: $122^{\circ} \pm 5^{\circ} \text{ F}$ ($50^{\circ} \pm 3^{\circ} \text{ C}$)
 - FLASH RATE:
QUAD: 60-65 FLASHES PER MINUTE
DUAL: 65-70 FLASHES PER MINUTE
 - CONNECTION: 16 AWG BLUNT CUT WIRE
 - MOUNTING: FLANGE, PIPE MOUNT
 - BASE MATERIAL: ALUMINUM
 - LENS MATERIAL: POLYCARBONATE
 - WEIGHT: 1.5 LBS
 - CERTIFICATIONS: SAE, CE, eMARK

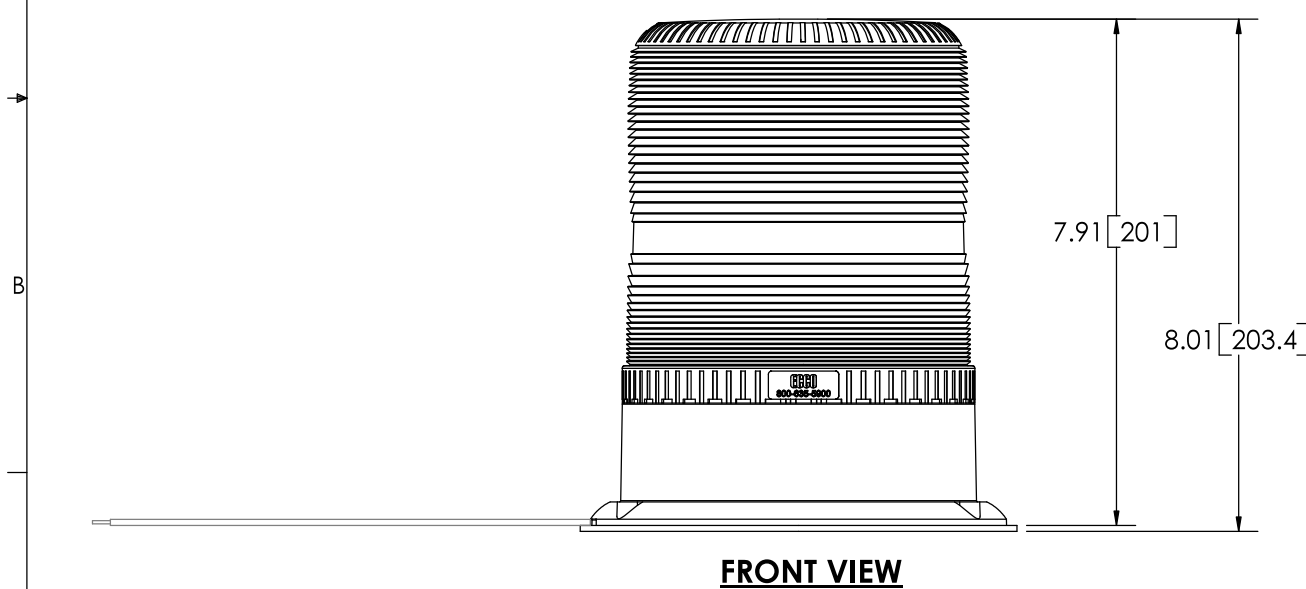

NOTES:
1. DIMENSIONS: INCHES [MILLIMETERS]

APPROVALS	DATE
DRAWN BY: TMM	
CHECKED:	
ELEC. ENG.:	
TEST ENG.:	
SALES:	

ECCO Electronic Controls Co.
An Employee Owned Company
800-635-5900 P.O. BOX 7246, BOISE, ID 83707

STROBE, 360*, 12-24 VDC, 3-12 JLS, D/Q

Project: #01043 - 6650/6670/6690 Date Created: 2001-12-20

SIZE: A DWG. NO. 6690X REV. A

SCALE 1:1 PREPARED PER ASME 14.100M-1998 / ASME Y14.1-1995 SHEET 1 OF 1

NON DISCLOSURE AGREEMENT

THIS DRAWING AND THE DESIGN IT DISCLOSES ARE THE PRIVATE PROPERTY OF ECCO AND IS ISSUED IN CONFIDENCE FOR ENGINEERING INFORMATION ONLY. THE DRAWING AND / OR DESIGN MAY NOT BE USED, COPIED, REPRODUCED, OR OTHERWISE DISCLOSED IN PART OR AS A WHOLE TO OUTSIDERS OR USED FOR ANY OTHER PURPOSE WITHOUT THE PRIOR WRITTEN CONSENT OF ECCO. THE DRAWING IS SUBJECT TO RECALL AT ANY TIME. YOUR POSSESSION OF THIS DOCUMENT CONSTITUTES ACCEPTANCE OF THESE TERMS. © 2001 ECCO

