


REVISION HISTORY		
REV.	DESCRIPTION	DATE
02	REVISED PER LM14246	2016-07-27
03	REVISED PER LM14246	2016-08-02
A	INITIAL RELEASE PER LM14246	2016-09-12

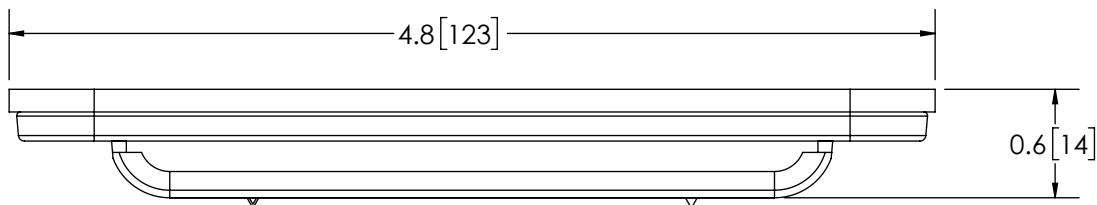

### SPECIFICATIONS

- CERTIFICATIONS: ECE R10; SAE EE CHART; IP67  
Note: Unique components, accessories, and hardware kits are not typically Included in the Product Certification Test Protocols. Unless otherwise Specified, the Product Certifications referred to herein are predicated upon the base product model configuration.
- FLASH MODE: SINGLE : 75 ± 5 FLASHES PER MINUTE  
SINGLE : 120 ± 5 FLASHES PER MINUTE  
DOUBLE : 75 ± 5 FLASHES PER MINUTE
- VOLTAGE (NOMINAL): 12 to 24 VDC
- VOLTAGE (EXTREME): 9.0 to 32.0 VDC
- CURRENT (PEAK): 0.75A (@ 12 VDC NOMINAL)
- POWER (MAXIMUM): 9.6W (@ 12 VDC NOMINAL)
- TEMPERATURE RANGE: -22°F (-30°C) TO 122°F (50°C)
- CONNECTION: 4 - 22 AWG CABLE
- MOUNTING: 2 BOLT
- BASE MATERIAL: ALUMINUM
- LENS MATERIAL: POLYCARBONATE
- PRODUCT WEIGHT: LBS (0.0 Kg)

FGS PRODUCT CHART				
FGS P/N	COLOR	SAE J595	CAT13	ECE R65
ED3701A	AMBER	CLASS 1	CLASS B	CLASS 1
ED3701B	BLUE	CLASS 1	CLASS B	CLASS 1
ED3701C	CLEAR	CLASS 1	N/A	N/A
ED3701G	GREEN	N/A	N/A	N/A
ED3701R	RED	CLASS 1	CLASS B	CLASS 1


### DISCLAIMER

DIMENSIONS, ILLUSTRATIONS, SPECIFICATIONS, AND CERTIFICATIONS CONTAINED IN THIS DOCUMENT ARE TYPICAL OF THE ACTUAL PRODUCT AND ARE SUBJECT TO CHANGE. ECCO ENGINEERING DOES NOT MAINTAIN FORMAL DESIGN CONTROL OF THIS PRODUCT.

### MOUNTING DISCLAIMER

MOUNTING MEASUREMENT IS FOR REFERENCE ONLY. MEASURE BEFORE DRILLING.

- NOTES:  
 1. ROHS COMPLIANT  
 2. DIMENSIONS IN INCHES[MILLIMETERS (FOR REFERENCE)]

SCALE 1:1		APPROVALS	DATE
CAD GENERATED DRAWING DO NOT MANUALLY UPDATE. MODEL REFERENCED:01		DRAWN BY	
TOLERANCES ARE IN INCHES, AND MILLIMETERS TOLERANCES UNLESS OTHERWISE STATED ARE:		CHECKED ABB	
MILLIMETERS DECIMALS XX. ± 1.0mm XX.X ± 0.5mm	INCHES DECIMALS X.X ± 0.1 X.XX ± 0.04 X.XXX ± 0.02	MECH. ENG. JLA	
	ANGLES ± 0.5° FRACTIONS ± 1/64	ELEC. ENG. TJT	
		TEST ENG. BDT	
		SALES. GLB	
THIRD ANGLE PROJECTION		 <a href="http://www.eccolink.com">www.eccolink.com</a> Americas (800) 635-5900   Europe +44 (0)113 237 5340   Asia Pacific +61 (0)3 63322444	
NON DISCLOSURE AGREEMENT		<b>6 LED, THIN SURFACE MNT, 12-24V</b> CUSTOMER PART NO. SEE CHART PRODUCT SERIES:	
THIS DRAWING AND THE DESIGN IT DISCLOSES ARE THE PRIVATE PROPERTY OF ESG AND IS ISSUED IN CONFIDENCE FOR ENGINEERING INFORMATION ONLY. THE DRAWING AND / OR DESIGN MAY NOT BE USED, COPIED, REPRODUCED, OR OTHERWISE DISCLOSED IN PART OR AS A WHOLE TO OUTSIDERS OR USED FOR ANY OTHER PURPOSE WITHOUT THE PRIOR WRITTEN CONSENT OF ESG. THE DRAWING IS SUBJECT TO RECALL AT ANY TIME. YOUR POSSESSION OF THIS DOCUMENT CONSTITUTES ACCEPTANCE OF THESE TERMS. © 2016 ECCO		SIZE: A DWG. NO. ED3701X SHEET 1 OF 1 Project: LM14246 Date Created: 2016-05-26	REV. A
		Electronically Controlled Use Latest Copy	